


AFTER CARE INSTRUCTIONS

THANK YOU FOR CHOOSING SEALASASH TO REFURBISH AND DRAUGHT SEAL YOUR WOODEN WINDOWS AND / OR DOORS. PROPERLY LOOKED AFTER YOUR DRAUGHT SEALS SHOULD LAST FOR MANY, MANY YEARS.

GENERAL CARE OF BRUSH AND DRAUGHT SEALS

- Avoid exposing all types of draught seals to excessive heat (eg heat guns).
- Only use warm soapy water to clean draught seals. Do not use solvents.
- Do not paint over the brush seals. Use a paint guard (supplied) to avoid painting the brushes.

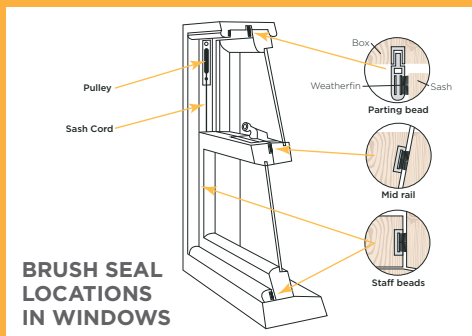

WHEN PAINTING YOUR WINDOWS

- Use the paint guard supplied by Sealasash to avoid painting the brushes. Place it over the brush and slide along the brush as you paint.
- To paint the linings behind the sash cords pull out the cord towards the centre of the sash to lift the

weight, then paint the wood and gently let the cord return towards the lining, lowering the weight. Don't paint the cords themselves.

- Move/open the sashes regularly when painting surfaces so they do not stick. If sashes do stick you can free them by carefully cutting the new paint line with a very sharp blade.
- Paint mid rails by lowering the top sash and raising the bottom sash. Use the paint guard on the meeting rail seal to protect it from paint.
- Do not paint pulleys or fasteners, use masking tape on these where possible.
- Where windows have been re-glazed, allow the new putty to dry for approximately 4 weeks, and then paint it to avoid cracking.

LOOKING AFTER ENERGYTECH OR COMFORTHUSH (COATED) GLASS

- Glass is coated on the inner-side and should only be cleaned with approved substances.
- Take care not to mark the coating with any metallic or sharp objects.
- Follow the care instructions provided by the manufacturer, available at www.viridianglass.com

FOR MORE INFORMATION ON THE MAINTENANCE OF YOUR WOODEN WINDOWS CONTACT US BY EMAIL AT INFO@SEALASASH.COM.AU



sealash.com.au